



Village of Hinsdale
19 E. Chicago Avenue
Hinsdale, IL 60521-3489
(630)789-7000

Village Website: www.villageofhinsdale.org

PUBLIC SERVICES UTILITY PERMIT APPLICATION - Permit Fee of \$100.00

Date of Application: 11-29-21 Permit No: ATT-0038 Permit Expiration Date: 12-31-22

Utility Company Information:

Company Name: AT&T
Address: 1000 COMMERCE DR
City, State, Zip: OAK BROOK IL 60523
Contact Person: CARL SIRAN
Phone Number: 708-897-7562
Email Address: CS223T@ATT.COM
Cell Number: 708-897-7562
Project/Work Order Number: ATT#A0221Z8

Contractor Information:

Company Name: JOSCO
Address: 2551 Division St #102
City, State, Zip: Joliet, IL, 60435
Contact Person: Chris Nurczyk-PM
Phone Number: OFFICE: 815-725-1975
Email Address: joe.w@josco.com
Cell Number:

PROJECT LOCATION: AT&T Fiber Overbuild 2022 PSA3104PD - Clay To Lincoln/Hinsdale Ave to W 7th Ave

Description of work covered under this permit: UPGRADE COPPER INFRASTRUCTURE TO FIBER DURING 2022. FOLLOW EXISTING COPPER PATH.
PROJECT A027217 WILL INTERCEPT EXISTING CONDUIT TO PLACE A NEW HANDHOLE (30"X48"X36") AND 5' OF CONDUIT TO EXISTING CABINET CLOSURE
LOCATED AT 118 W 4TH ST.
PROJECT A027990 WILL PLACE APPROX 2200' OF 3" CONDUIT IN VARIOUS LOCATIONS (SEE ATTACHED PRINT) AND 1 HANDHOLE 30"X48"X36")
Estimated cost for Excavation approx \$12,000

Start Date: March 2022

Completion Date: 6-23-22

Site Plan/Details/Specifications (3 sets) included with application?
Currently registered as a Utility Contractor with the Village of Hinsdale?
Engineer Estimate of Cost included with application?

☒ YES ☐ NO
☒ YES ☐ NO
☒ YES ☐ NO

Type of Utility: ☐ ComEd ☐ Nicor ☐ Comcast ☐ Water ☐ Sewer
☒ Communications: ☒ Fiber Optic ☐ Wireless ☐ Other:

Applicant Information:

Print Name: CARL SIRAN-AT&T OSPE Phone Number: 708-897-7562
Company: AT&T Email Address: CS223T@ATT.COM
Signature: CARL SIRAN-ATT ENGINEER Digitally signed by CARL SIRAN-ATT ENGINEER
Date: 2021.11.29 13:22:44 -05'00' Date: 11-29-21

ALL CONSTRUCTION SHALL BE DONE IN ACCORDANCE WITH THE LATEST EDITION IN EFFECT ON THE DATE OF PERMIT APPLICATION OF THE FOLLOWING: STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION & SUPPLEMENTAL SPECIFICATIONS AND RECURRING SPECIAL PROVISIONS BY THE ILLINOIS DEPARTMENT OF TRANSPORTATION, ILLINOIS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS, STANDARD SPECIFICATIONS FOR WATER AND SEWER MAIN CONSTRUCTION IN ILLINOIS, AND THE VILLAGE OF HINSDALE SUBDIVISION ORDINANCES (Ord. O2007-73, 11-6-2007) AND ENGINEERING STANDARDS.

Village Use Only

Permit Approved: ☒ YES ☐ NO

Conditions for Approval/Reasons for Denial: RESTORE ALL DISTURBED AREAS WITHIN 14 DAYS
OF COMPLETION. NOTIFY ALL ADJACENT RESIDENTS 48 HOURS PRIOR TO
START.

Approved By: CARL SIRAN-AT&T OSPE J. A. Diaz Date: 11-29-21 12/09/21


**AT&T Serving area
PSA 3104PD**

RETROFIT EXISTING AT&T CABINET FOR
FIBER

LOCATED IN ROW 118 W 4TH
48.74" H X 47.39" W X 19.58" D

= NEW FIBER PLACED IN 2022

PLACE NEW FIBER TO SERVE ALL
RESIDENTS

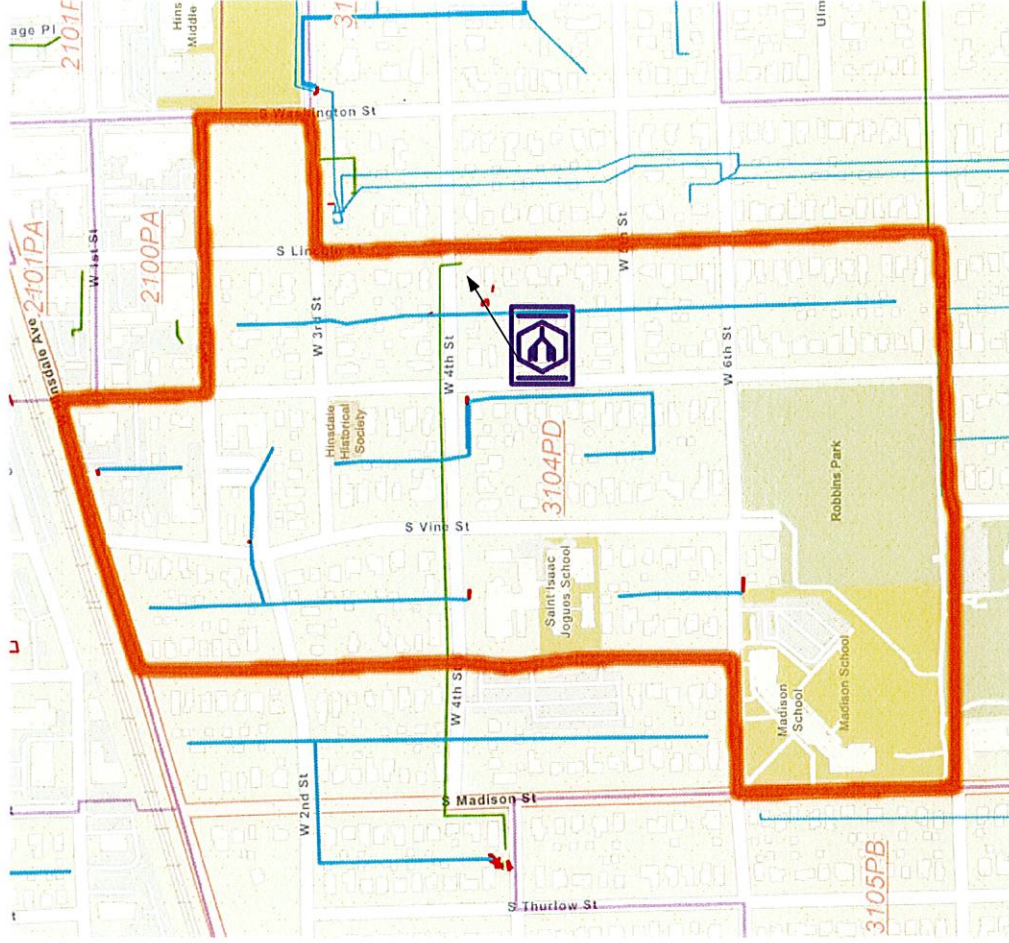


HINSDALE FIBER OVERBUILD
ENGINEER: CARL SIRAN
TELEPHONE: 630-573-5481
MUNICIPALITY: HINSDALE



PERMIT PRINT



ISSUE	DATE
1	11/5/21

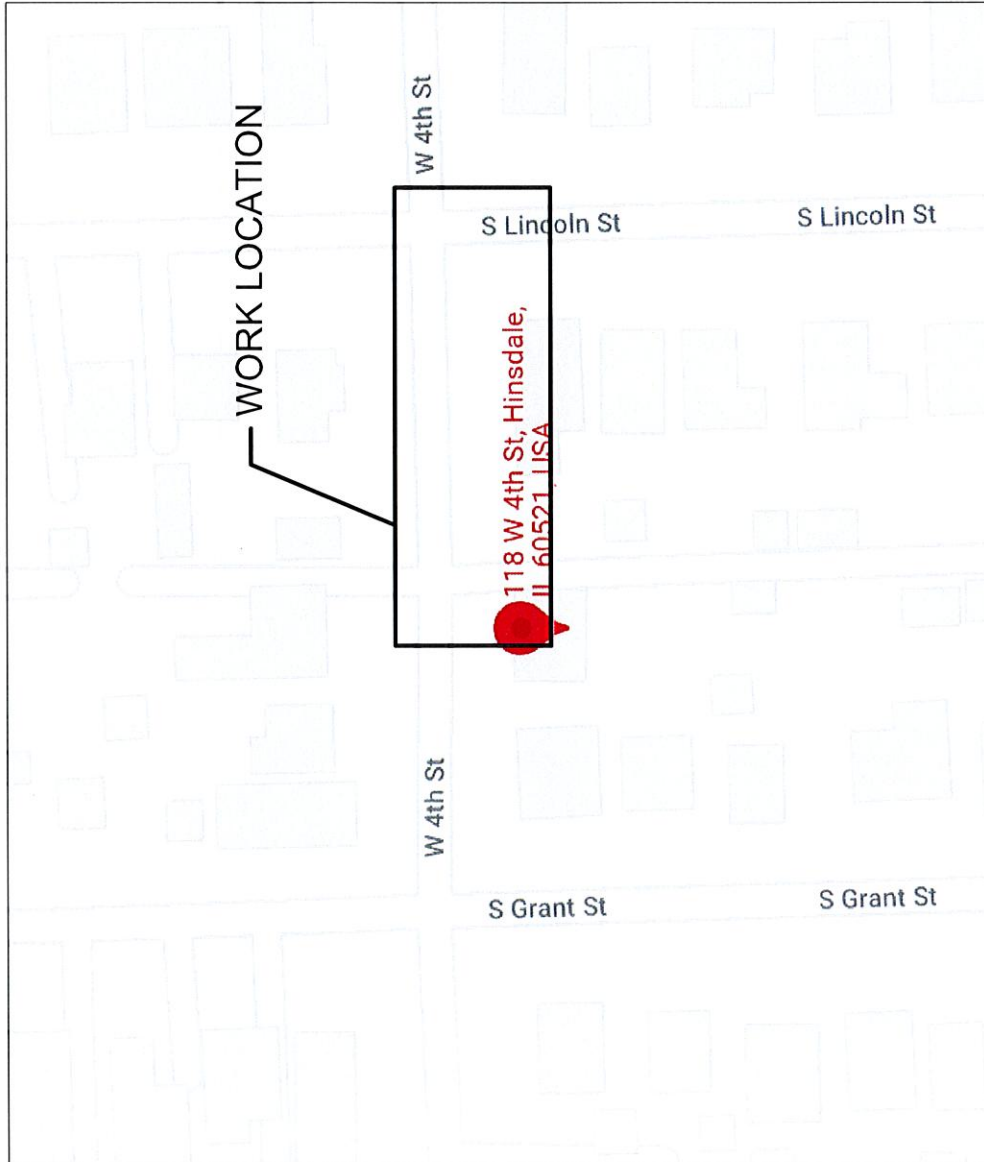

A027217 PROPOSED DETAILS	
DESCRIPTION	QUANTITY
MANHOLE	0
PFP	1
FLOWER POT	0
HANDHOLE	0
BORE PIT/TURN PIT/DIG PIT	0



AT&T PROJECT: A027217
 ENGINEER: BRIAN TAZELAAR
 TEL # 630-418-9001
 QUARTER SECTION: NW-12
 MUNICIPALITY: HINSDALE
 TOWNSHIP: DOWNERS GROVE
 WIRE CENTER: HINSDALE
 COUNTY OF: DUPAGE
 DWG 1 OF 3 REV. NO.

PREPARED BY: N.SINGH
 CHC CONSULTING
 1845 W. Orangewood Ave., Suite 300
 Orange, CA 92668
 (949) 250-0004 / FAX (949) 250-0008

PHYSICAL ADDRESS:-
 118 W 4TH ST, HINSDALE, IL 60521




PERMIT PRINT


GENERAL CONSTRUCTION NOTES:

1. LOCATE ALL UNDERGROUND OBSTRUCTIONS PRIOR TO DIGGING CONTACT J.U.L.I.E. AT 8-1-1 TWO BUSINESS DAYS IN ADVANCE TO DIGGING
 2. RESTORE ALL DISTURBED GROUNDS TO ORIGINAL OR BETTER CONDITION AS SOON AS POSSIBLE OR WITHIN TWO (2) WEEKS AFTER CONSTRUCTION IS COMPLETE.
 3. AT&T CONTRACTOR TO PLACE CONDUIT NO LESS THAN 24" DEEP.
 4. AT&T CONTRACTOR TO PROVIDE ALL BARRICADES AND WORK AREA PROTECTION.
 5. AT&T CONTRACTOR IS REQUIRED TO KEEP ALL ROADWAY PAVEMENT, CURBS, CUTTERS AND STORM WATER COLLECTORS FREE OF MUD AND OTHER DEBRIS AT ALL TIMES DURING CONSTRUCTION.
 6. ALL PROPOSED WORK IS IN EXISTING PUBLIC RIGHT OF WAY AND/OR UTILITY EASEMENT.
 7. TUNNEL ALL TREES PER BUREAU OF FORESTRY GUIDELINES.
- CAUTION: VOLTAGE RANGES FROM 301V TO 15KV
- THIS PROJECT REQUIRES COORDINATION WITH UT: NA

- ① HAND DIG & PLACE 1-2" DUCT - 5'
- ② DIG 4'X6' PIT
LOCATE & INTERCEPT EXIST. CONDUIT
& PL. NEW (30"X48"X36") HH -118
- ③ PL. NEW GROUND BED

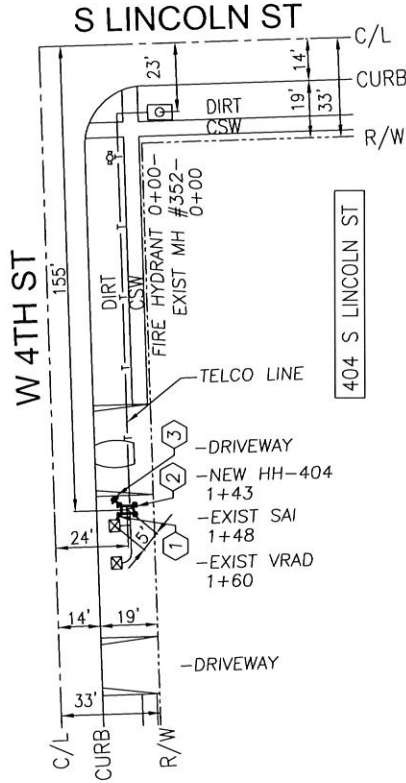

VICINITY MAP

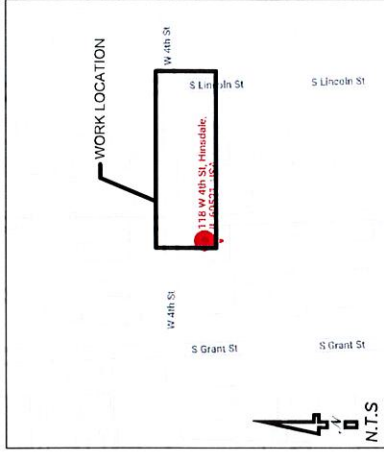

LEGEND	
☒	VRAD
☒	SAI
☒	HH
☒	MH
☒	FIRE HYDRANT



AT&T PROJECT: A027217
ENGINEER: BRIAN TAZELAAR
TEL # 630-418-9001
QUARTER SECTION: NW-12
MUNICIPALITY: HINSDALE
TOWNSHIP: DOWNERS GROVE
WIRE CENTER: HINSDALE
COUNTY OF: DUPAGE
DWG 2 OF 3 REV. NO. _____

PREPARED BY: N.SINGH

CHC CONSULTING
1845 W. Orangewood Ave., Suite 300
Orange, CA 92668
(949) 250-0004 / FAX (949) 250-0006

EXCAVATION DATA	
DIRT	HAND DIG
PL. HH (30"X48"X36")	5 FT.
DIG PIT 4'X6'=24 SQ FT	

PERMIT PRINT



ISSUE

1

DATE

11/5/21

i. GENERAL CONDITIONS

1. The applicant shall comply with all rules, regulations and provisions of the Ordinance unless specifically modified or specified in this GC.
2. The minimum storm water submittal and design requirements shall be as delineated below in the Submittal Requirements and the Special Conditions & Design Requirements sections of this GC. Other items may be required by the Director or Administrator to demonstrate compliance with the Ordinance.
3. In a non-waiver or partial waiver community, authorization is required from the Director for work in a flood plain, wetland or non-turf grass buffer area. If required, site wetland boundaries shall be demarcated in the field and verified by an Environmental Scientist representing the County, or the Complete Waiver Community. Mitigation measures may be required for any impacts. Any significant impact, based on the opinion of the Director or the Administrator, may be judged to be beyond the scope of work that may be authorized by this GC.
4. All disturbed areas are to be seeded, sodded, or planted with other vegetation as approved by the Director or Administrator; if seeded, the restored area must be protected with erosion control measures until the vegetation has been established and the ground is stabilized.
5. Minor temporary stockpiling of materials or fills with the flood plain may be allowed. The Director or Administrator may place limits on how long and where the temporary stockpiling can take place.
6. Construction activities shall commence within one hundred eighty (180) calendar days after the issuance of any local permit or jurisdictional authorization otherwise this GC shall be null and void. If in the opinion of the Director or the Administrator conditions existed beyond the control of the applicant preventing construction activities to commence, additional time may be granted beyond the one hundred eighty (180) calendar day time limit.
7. A certification under this GC expires one (1) year following the date of certification issuance unless extended in accordance with Section 15-32 of the Ordinance.
8. A security as required in accordance with Article VI of the Ordinance may be waived by the Director or Administrator.

ii. SPECIAL CONDITIONS & DESIGN REQUIREMENTS

The following conditions and minimum design requirements must be met for this GC unless waived by the Director or Administrator:

1. Permanent impact to flood plain, wetland, or buffer areas is not authorized by this GC. Activities under this GC are strictly limited to development activity having only a temporary impact to flood plain, buffer and/or wetland.
2. Consultation with an environmental scientist will be required for work in or impacts to buffers unless the work or impact has been determined by the Director or Administrator to be minor.
3. The construction shall not result in any change in existing ground elevations.
4. In buffers and wetlands, the excavated areas shall be backfilled with native soil in the same stratification in which the soil was removed.
5. Timber/composite matting or other approved equivalent and/or low compaction equipment must be utilized when access is necessary within wetland and buffer areas.
6. Upon completion of the project, permanent vegetative cover within wetland and/or non-turf buffers shall be equivalent to or of higher quality than the pre-disturbance vegetation.



AT&T PROJECT: A027217

ENGINEER: BRIAN TAZELAAR

TEL # 630-418-9001

QUARTER SECTION: NW-12

MUNICIPALITY: HINSDALE

TOWNSHIP: DOWNERS GROVE

WIRE CENTER: HINSDALE

COUNTY OF: DUPAGE

DWG 3 OF 3 REV. NO. _____

PREPARED BY: N.SINGH

 **CHC CONSULTING**
1945 W. Greenwood Ave., Suite 300
Orland, CA 92658
(949) 250-0004 / FAX (949) 250-0006




ISSUE	DATE
1	11/23/21

A027990 PROPOSED DETAILS	
DESCRIPTION	QUANTITY
MANHOLE	—
PEL/PFP/CMPPH	—
FLOWER POT	—
HANDHOLE	1
BORE PIT/TURN PIT/DIG PIT	—



SCALE—N.T.S

AT&T PROJECT: A027990
ENGINEER: BRIAN TAZELAAR
TEL # 630-418-9001
QUARTER SECTION: NW-12
MUNICIPALITY: HINSDALE
TOWNSHIP: DOWNERS GROVE
WIRE CENTER: HINSDALE
COUNTY OF: DUPAGE
DWG 1 OF 6 REV. NO. _____

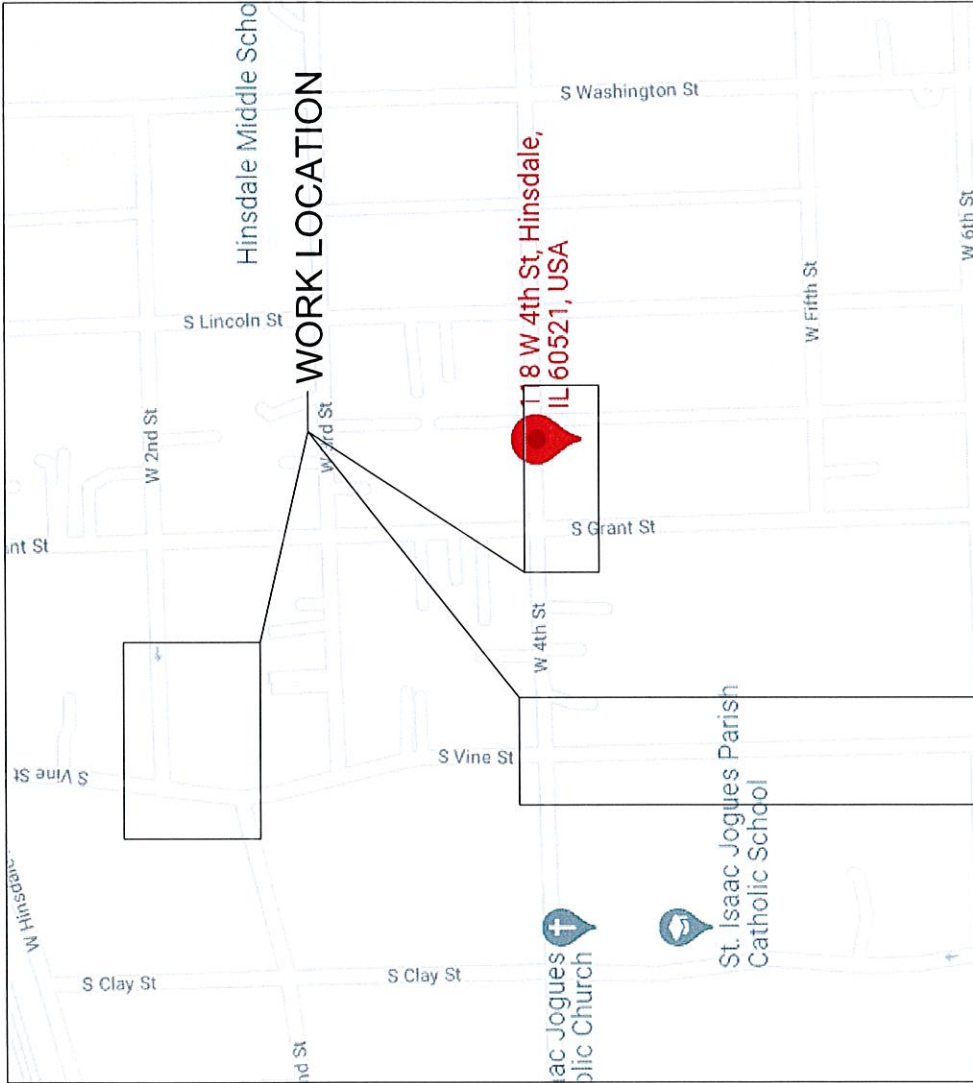

PHYSICAL ADDRESS:-
118 W 4TH ST, HINSDALE, IL 60521


PREPARED BY: V. GUPTA
CHC CONSULTING
1845 W. Orangewood Ave., Suite 300
Orange, CA 92668
(949) 250-0004 / FAX (949) 250-0006

1
SSUE


DATE _____

11/23/21

WORK
LOCATION

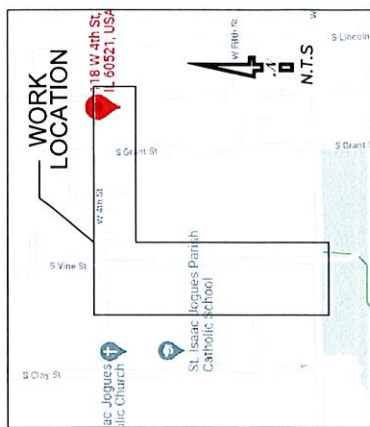

VICINITY MAP

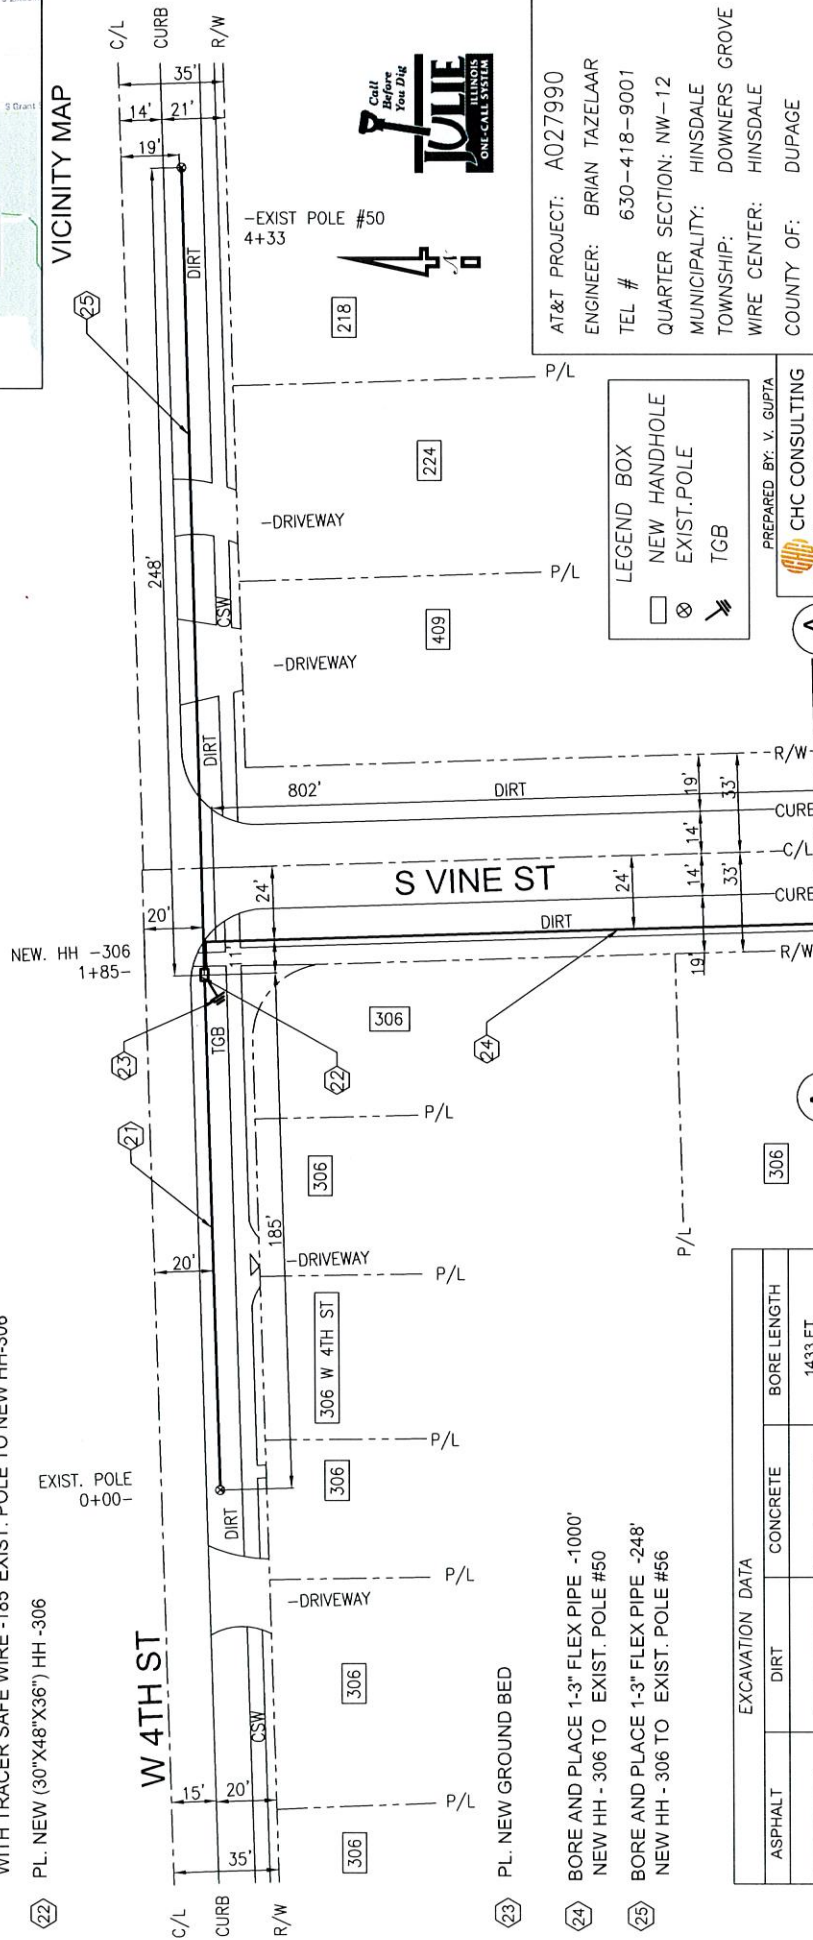

AT&T PROJECT: A027990
 ENGINEER: BRIAN TAZELAAR
 TEL # 630-418-9001
 QUARTER SECTION: NW-12
 MUNICIPALITY: HINSDALE
 TOWNSHIP: DOWNERS G
 WIRE CENTER: HINSDALE
 COUNTY OF: DUPAGE

PREPARED BY: V. GUPTA

 CHC CONSULTING
1845 W. Orangewood Ave., Suite 300
Orange, CA 92868
(949) 250-0004 / FAX (949) 250-0006

1845 W. Orangewood Ave., Suite 300
Orange, CA 92668
(949) 250-0004 / FAX (949) 250-0006

SEE MATCHLINE A-A ON SHEET 3



EXCAVATION DATA			
ASPHALT	DIRT	CONCRETE	BORE LENGTH
_____	_____	_____	1433 FT.

GENERAL CONSTRUCTION NOTES:

1. LOCATE ALL UNDERGROUND OBSTRUCTIONS PRIOR TO DIGGING
2. CONTACT DIGGERS HOTLINE AT 8-1-1 TWO BUSINESS DAYS IN ADVANCE TO DIGGING
3. RESTORE ALL DISTURBED GROUNDS TO ORIGINAL OR BETTER CONDITION AS SOON AS POSSIBLE OR WITHIN TWO (2) WEEKS AFTER CONSTRUCTION IS COMPLETE.
4. AT&T CONTRACTOR TO PLACE CONDUIT NO LESS THAN 30" DEEP.
5. AT&T CONTRACTOR TO PROVIDE ALL BARRICADES AND WORK AREA PROTECTION.
6. AT&T CONTRACTOR IS REQUIRED TO KEEP ALL ROADWAY PAVEMENT, CURBS, GUTTERS AND STORM WATER COLLECTORS FREE OF MUD AND OTHER DEBRIS AT ALL TIMES DURING CONSTRUCTION.
7. ALL PROPOSED WORK IS IN EXISTING PUBLIC RIGHT OF WAY AND/OR UTILITY EASEMENT.
8. TUNNEL ALL TREES PER BUREAU OF FORESTRY GUIDELINES.
9. CAUTION: VOLTAGE RANGES FROM 301V TO 15KV
10. THIS PROJECT REQUIRES COORDINATION WITH UT: NA

24' BORE AND PLACE 1-3" FLEX PIPE -1000'
NEW HH -306 TO EXIST. POLE #50

CONTRACTOR PRINT

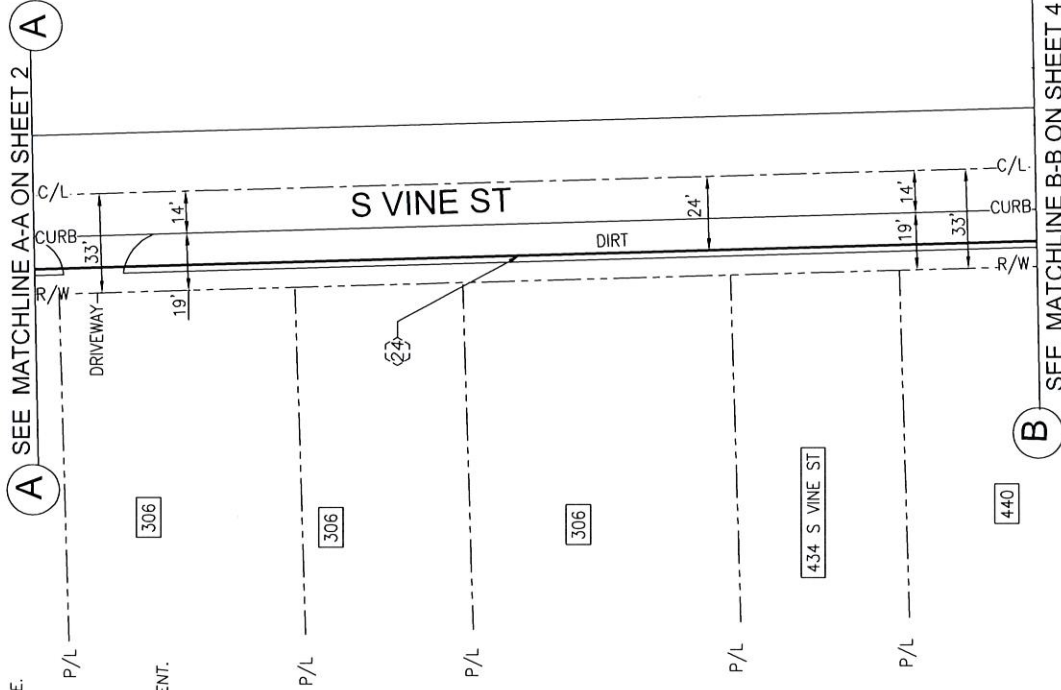

ISSUE	DATE
1	11/23/21



AT&T PROJECT: A027990
ENGINEER: BRIAN TAZELAAR
TEL # 630-418-9001
QUARTER SECTION: NW-12
MUNICIPALITY: HINSDALE
TOWNSHIP: DOWNERS GROVE
WIRE CENTER: HINSDALE
COUNTY OF: DUPAGE
DWG 3 OF 7 REV. NO.

PREPARED BY: V. GUPTA
CHC CONSULTING
1845 W. Oringewood Ave., Suite 300
Orange, CA 92668
(949) 250-0004 / FAX (949) 250-0006

GENERAL CONSTRUCTION NOTES:


1. LOCATE ALL UNDERGROUND OBSTRUCTIONS PRIOR TO DIGGING
2. CONTACT DIGGERS HOTLINE AT 8-1-1 TWO BUSINESS DAYS IN ADVANCE TO DIGGING
3. RESTORE ALL DISTURBED GROUNDS TO ORIGINAL OR BETTER CONDITION AS SOON AS POSSIBLE OR WITHIN TWO (2) WEEKS AFTER CONSTRUCTION IS COMPLETE.
3. AT&T CONTRACTOR TO PLACE CONDUIT NO LESS THAN 30" DEEP.
4. AT&T CONTRACTOR TO PROVIDE ALL BARRICADES AND WORK AREA PROTECTION.
5. AT&T CONTRACTOR IS REQUIRED TO KEEP ALL ROADWAY PAVEMENT, CURBS, GUTTERS AND STORM WATER COLLECTORS FREE OF MUD AND OTHER DEBRIS AT ALL TIMES DURING CONSTRUCTION.
6. ALL PROPOSED WORK IS IN EXISTING PUBLIC RIGHT OF WAY AND/OR UTILITY EASEMENT.
7. TUNNEL ALL TREES PER BUREAU OF FORESTRY GUIDELINES.
- CAUTION: VOLTAGE RANGES FROM 301V TO 15KV
- THIS PROJECT REQUIRES COORDINATION WITH UT: NA

(24) BORE AND PLACE 1-3" FLEX PIPE -1000'
NEW HH -306 TO EXIST. POLE #50

CONTRACTOR PRINT



ISSUE	DATE
1	11/23/21

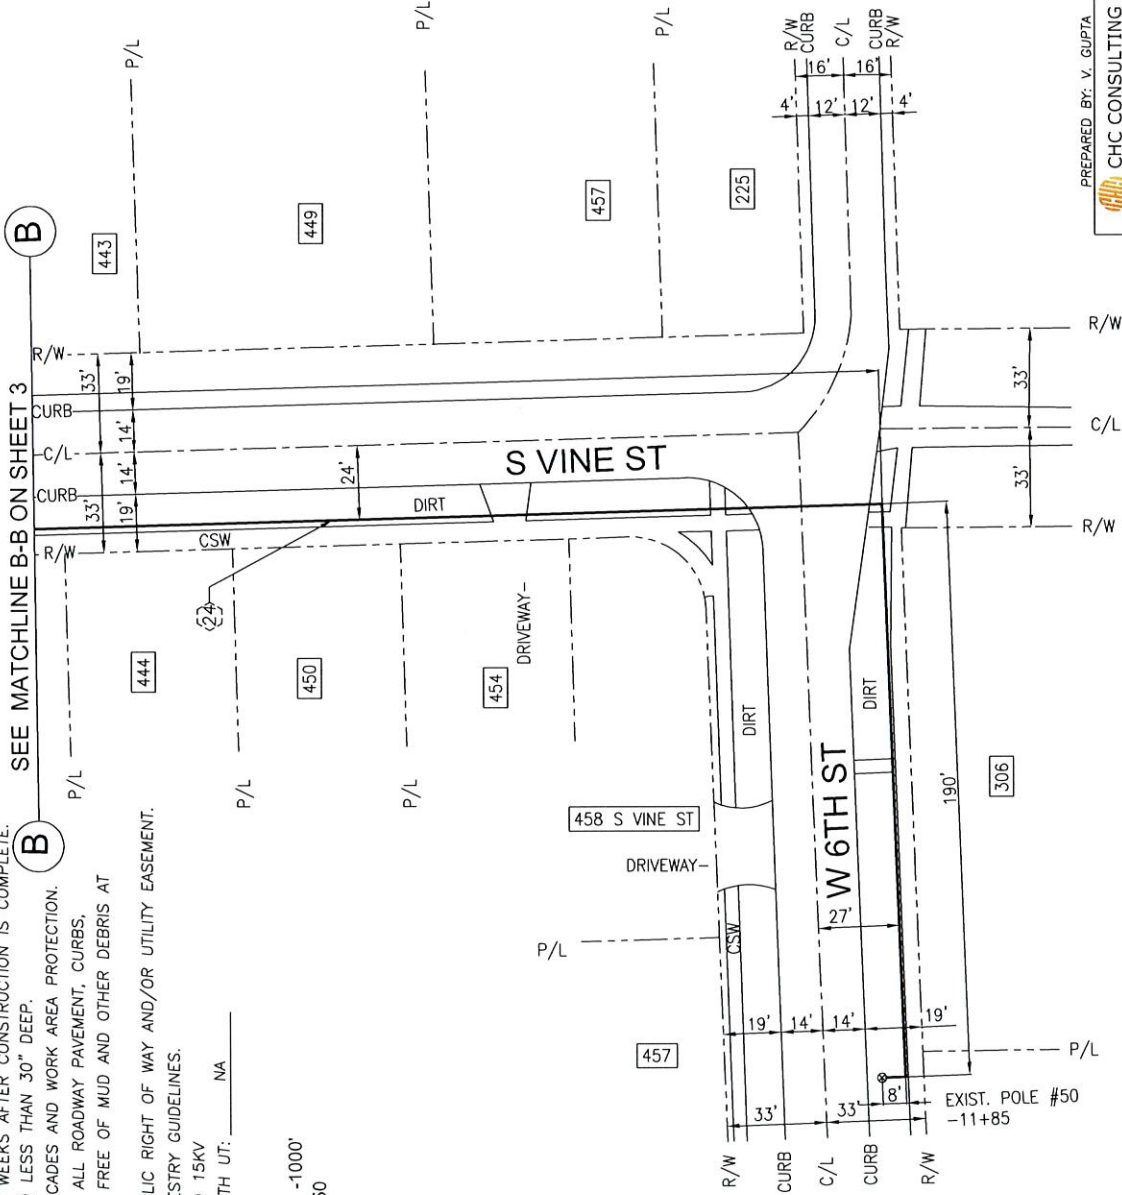


AT&T PROJECT: A027990
ENGINEER: BRIAN TAZELAAR
TEL # 630-418-9001
QUARTER SECTION: NW-12
MUNICIPALITY: HINSDALE
TOWNSHIP: DOWNERS GROVE
WIRE CENTER: HINSDALE
COUNTY OF: DUPAGE
DWG 4 OF 7 REV. NO.

PREPARED BY: V. GUPTA
CHC CONSULTING
1845 W. Orangewood Ave., Suite 300
Orange, CA 92668
(949) 250-0004 / FAX (949) 250-0006


	ISSUE	DATE
	1	11/23/21

- CONTRACTOR PRINT

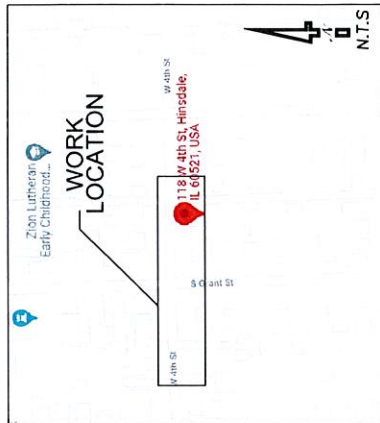

VICINITY MAP

LEGEND BOX	
☐	EXIST. HANDHOLE
☒	EXIST. POLE

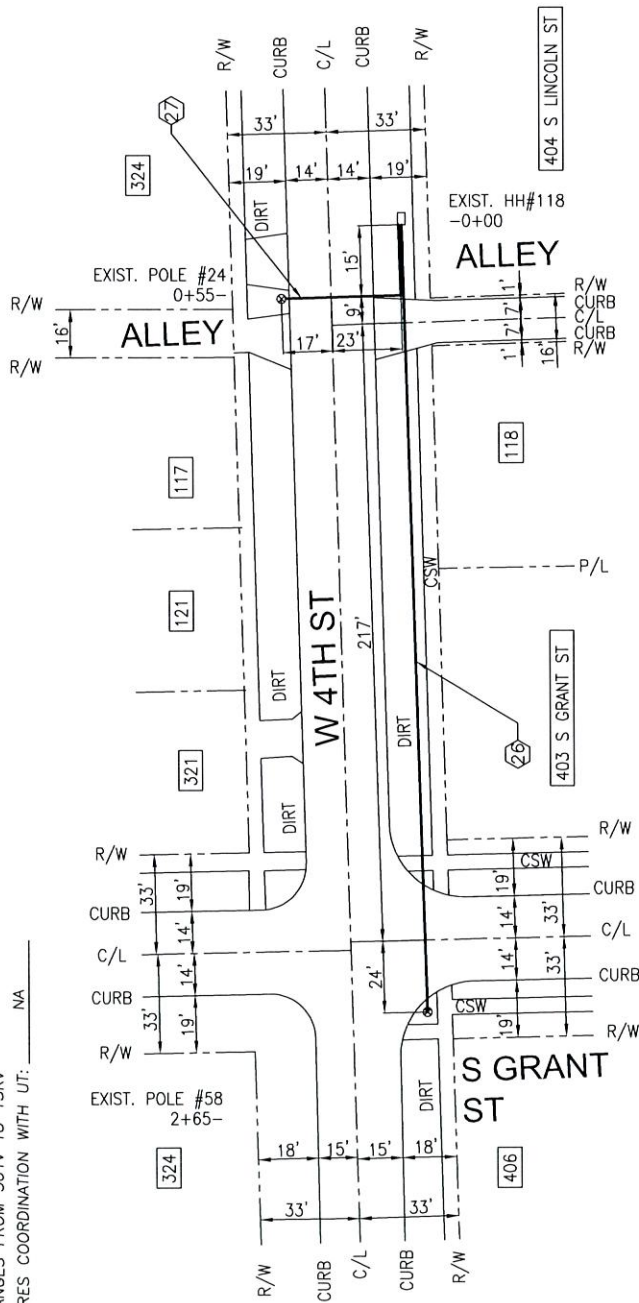

EXCAVATION DATA			
ASPHALT	DIRT	CONCRETE	BORE LENGTH
_____	_____	_____	320 FT.

PREPARED BY: V. GUPTA

 **CHC CONSULTING**
1845 W. Orangewood Ave., Suite 300
Orange, CA 92668
(949) 250-0004 / FAX (949) 250-0006

AT&T PROJECT: A027990
 ENGINEER: BRIAN TAZELAAR
 TEL # 630-418-9001
 QUARTER SECTION: NW-20
 MUNICIPALITY: HINSDALE
 TOWNSHIP: DOWNERS
 WIRE CENTER: HINSDALE
 COUNTY OF: DUPAGE

DWG 5 OF 7 REV. NO.

ISSUE	DATE
-------	------


11/23/21

CONTRACTOR PRINT

C SEE MATCHLINE C-C ON SHEET 7

1. LOCATE ALL UNDERGROUND OBSTRUCTIONS PRIOR TO DIGGING
CONTACT DIGGERS HOTLINE AT 8-1-1 TWO BUSINESS DAYS IN ADVANCE TO DIGGING
2. RESTORE ALL DISTURBED GROUNDS TO ORIGINAL OR BETTER CONDITION
AS SOON AS POSSIBLE OR WITHIN TWO (2) WEEKS AFTER CONSTRUCTION IS COMPLETE.
3. AT&T CONTRACTOR TO PLACE CONDUIT NO LESS THAN 30" DEEP.
4. AT&T CONTRACTOR TO PROVIDE ALL BARRICADES AND WORK AREA PROTECTION.
5. AT&T CONTRACTOR IS REQUIRED TO KEEP ALL ROADWAY PAVEMENT, CURBS,
GUTTERS AND STORM WATER COLLECTORS FREE OF MUD AND OTHER DEBRIS AT
ALL TIMES DURING CONSTRUCTION.
6. ALL PROPOSED WORK IS IN EXISTING PUBLIC RIGHT OF WAY AND/OR UTILITY EASEMENT.
7. TUNNEL ALL TREES PER BUREAU OF FORESTRY GUIDELINES.
- CAUTION: VOLTAGE RANGES FROM 301V TO 15KV
- THIS PROJECT REQUIRES COORDINATION WITH UT: NA

28 BORE AND PLACE 1-3" FLEX PIPE
ALONG WITH TRACER SAFE WIRE-690'
EXIST. POLE #33 TO EXIST. POLE #25

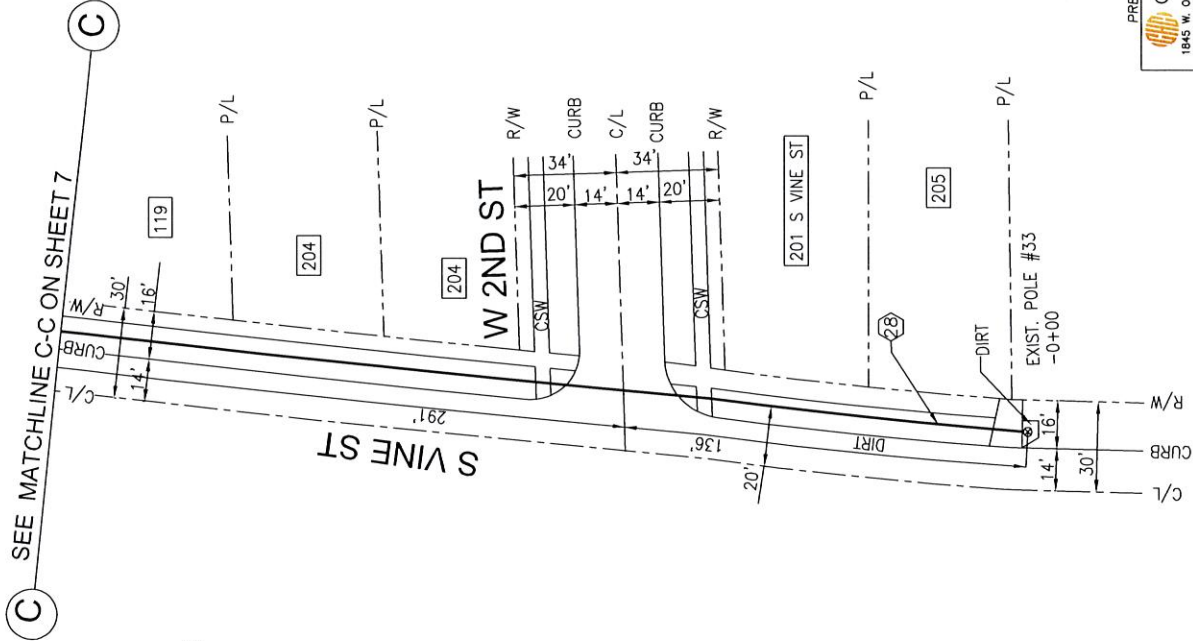

VICINITY MAP

LEGEND BOX
EXIST. POLE



AT&T PROJECT: A027990
ENGINEER: BRIAN TAZELAAR
TEL # 630-418-9001
QUARTER SECTION: NW-12
MUNICIPALITY: HINSDALE
TOWNSHIP: DOWNERS GROVE
WIRE CENTER: HINSDALE
COUNTY OF: DUPAGE

PREPARED BY: V. GUPTA

CHC CONSULTING
1845 W. Orangewood Ave., Suite 300
Orange, CA 92668
(949) 250-0004 / FAX (949) 250-0000

EXCAVATION DATA		
ASPHALT	DIRT	CONCRETE
_____	_____	_____
		690 FT.

GENERAL CONSTRUCTION NOTES:


1. LOCATE ALL UNDERGROUND OBSTRUCTIONS PRIOR TO DIGGING
CONTACT DIGGERS HOTLINE AT 8-1-1 TWO BUSINESS DAYS IN ADVANCE TO DIGGING
2. RESTORE ALL DISTURBED GROUNDS TO ORIGINAL OR BETTER CONDITION
AS SOON AS POSSIBLE OR WITHIN TWO (2) WEEKS AFTER CONSTRUCTION IS COMPLETE.
3. AT&T CONTRACTOR TO PLACE CONDUIT NO LESS THAN 30" DEEP.
4. AT&T CONTRACTOR TO PROVIDE ALL BARRICADES AND WORK AREA PROTECTION.
5. AT&T CONTRACTOR IS REQUIRED TO KEEP ALL ROADWAY PAVEMENT, CURBS,
GUTTERS AND STORM WATER COLLECTORS FREE OF MUD AND OTHER DEBRIS AT
ALL TIMES DURING CONSTRUCTION.
6. ALL PROPOSED WORK IS IN EXISTING PUBLIC RIGHT OF WAY AND/OR UTILITY EASEMENT.
7. TUNNEL ALL TREES PER BUREAU OF FORESTRY GUIDELINES.
CAUTION: VOLTAGE RANGES FROM 301V TO 15KV
- THIS PROJECT REQUIRES COORDINATION WITH UT: NA

(28) BORE AND PLACE 1-3" FLEX PIPE
ALONG WITH TRACER SAFE WIRE-690'
EXIST. POLE #33 TO EXIST. POLE #25

CONTRACTOR PRINT



ISSUE	DATE
1	11/23/21

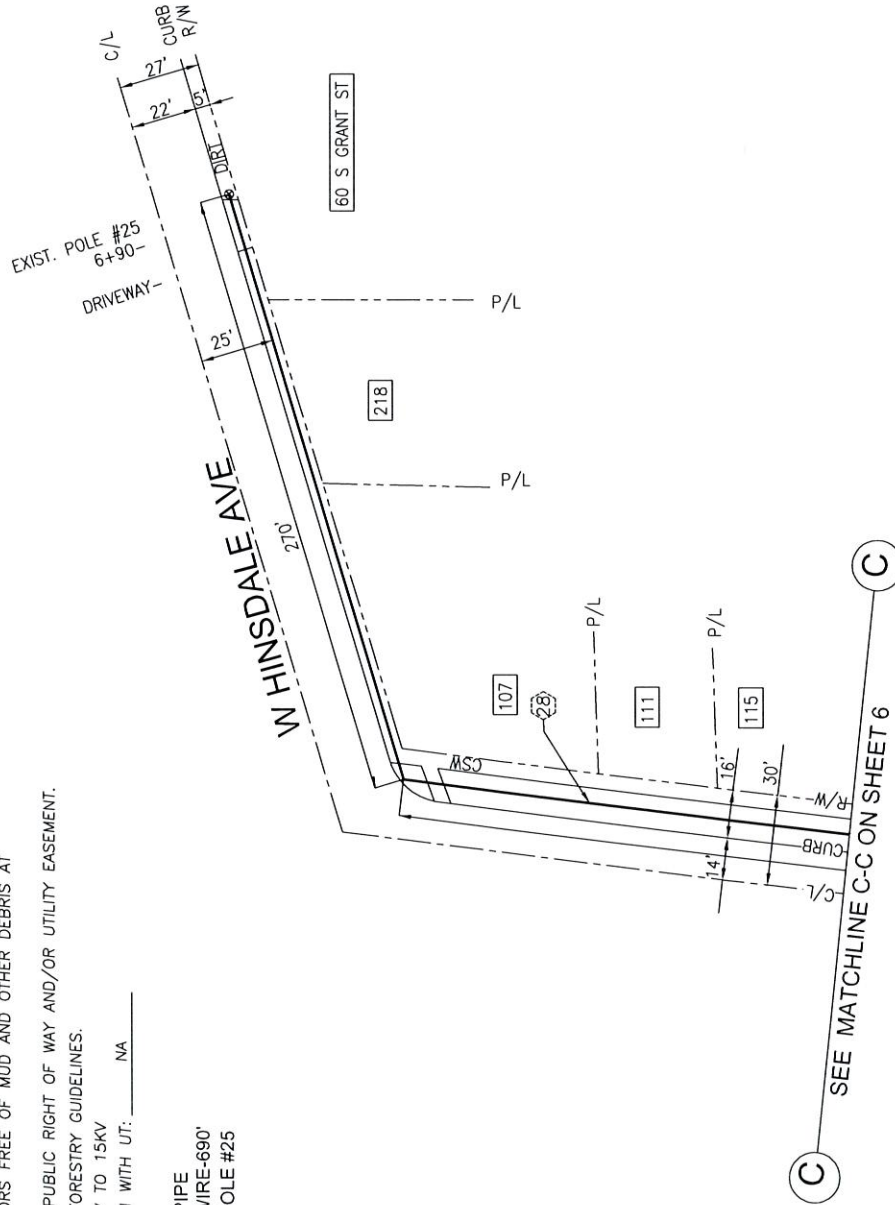

AT&T PROJECT: A027990
ENGINEER: BRIAN TAZELAAR
TEL # 630-418-9001
QUARTER SECTION: NW-12
MUNICIPALITY: HINSDALE
TOWNSHIP: DOWNERS GROVE
WIRE CENTER: HINSDALE
COUNTY OF: DUPAGE
DWG 7 OF 7 REV. NO. _____

PREPARED BY: V. GUPTA
CHC CONSULTING
1845 W. Grandwood Ave., Suite 300
Orange, CA 92668
(949) 250-0004 / FAX (949) 250-0006