

**ITB 2023-39 Songbird Avenue Intersection Improvements and Floyd Gray Road/Lawhon
Mill Road Paving Project
Addendum No. 1**



**Addendum No. 1 ITB 2023-39
SONGBIRD AVENUE INTERSECTION IMPROVEMENTS AND FLOYD GRAY
ROAD/LAWHON MILL ROAD PAVING PROJECT**

Issued January 17, 2024

SECTION 1.0 SCHEDULE OF EVENTS

Failure to comply with this or any other paragraph of this ITB shall be sufficient reason for rejection of the Bid.

All times listed in the Schedule of Events are Eastern Standard Time (EST).

Event	Date/Time
Bid Advertisement Date	December 14, 2023
Release of Invitation to Bid	December 14, 2023
Mandatory Pre-Construction Conference	January 3, 2024 @ 10:00 A.M.
Questions Due from Prospective Bidder	January 10, 2024 @ 5:00 P.M.
Responses to questions due	January 17, 2024
BIDS DUE TO BOCC	January 30, 2024 @ 3:00 P.M.
Posting of Intended Award	February 12, 2024
Board Consideration of Intended Award	February 20, 2024
Posting of Notice of Award	February 21, 2024

This addendum is being posted to provide responses to the questions that were received.

**ITB 2023-39 Songbird Avenue Intersection Improvements and Floyd Gray Road/Lawhon
Mill Road Paving Project
Addendum No. 1**

Questions due January 10th and responses to proposal questions due on or before January 17th

Questions and Answers

Q1: Since then, Songbird Avenue cannot be closed at the same time while work is being done on the turn lane and roundabout. Can the project duration be extended from 100 days to 130?

A1: Substantial completion will be 100 calendar days and final completion will be 120 calendar days from the date of commencement.

Q2: Regarding Arran Road/Songbird Avenue Roundabout: Are there any utilities conflict with this project? Has the underground utilities been surveyed? If So, will utilities be relocated ahead of time?

A2: Utilities have been located to the extent possible. There is one Talquin owned box that will be located within the footprint of the new pavement and will need to be upgraded to a traffic rated box. Talquin has ordered that material and will make that change. The contractor will need to adjust the box to the final elevation as necessary to be flush with the proposed pavement.

Q3: Regarding Arran Road/Songbird Avenue Roundabout: Is there a color specification/requirement for the concrete pavement at the round about?


A3: Yes. The color shall be AMS-STD-595-21105 RED, as shown on the typical section on sheet 5. The cost of the coloring shall be included in the price of the concrete.

Q4: Regarding Floyd Gray Road/Lawhon Mill Road: Can you please provide a road section for the Floy Gray Rd and Lawhon Mil Rd?


A4: Please see the attached typical sections.

Q5: Regarding Floyd Gray Road/Lawhon Mill Road: Will the subcontractor be responsible to achieve density on the existing surface? If So, Can you please provide a geotechnical report of the existing soil conditions?

A5: No geotechnical investigations have been completed. The County will be responsible for installing the limerock base and preliminary compaction efforts. The contractor will be responsible for ensuring density and final shaping of the base prior to paving. Although unlikely, if sub-base conditions prevent the contractor from achieving the minimum base density, adjustments will be made at that time by the County.

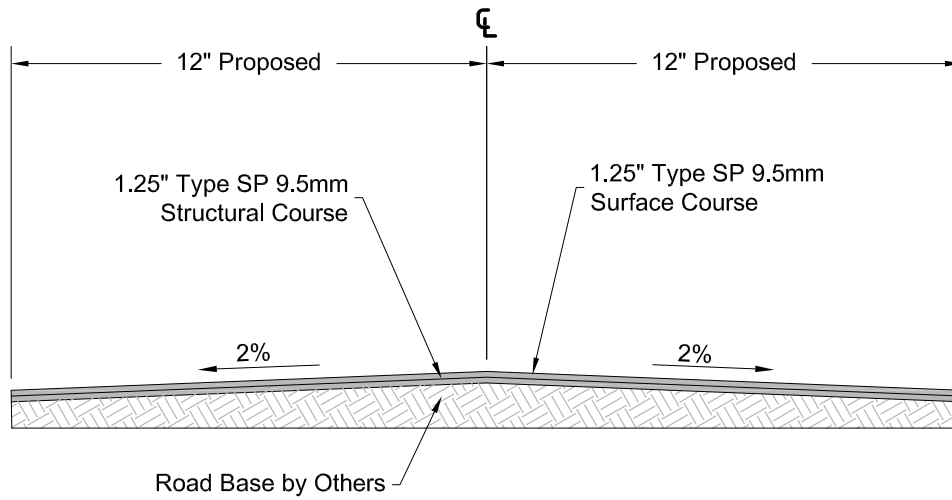

Typical Section - Lawhon Mill Road

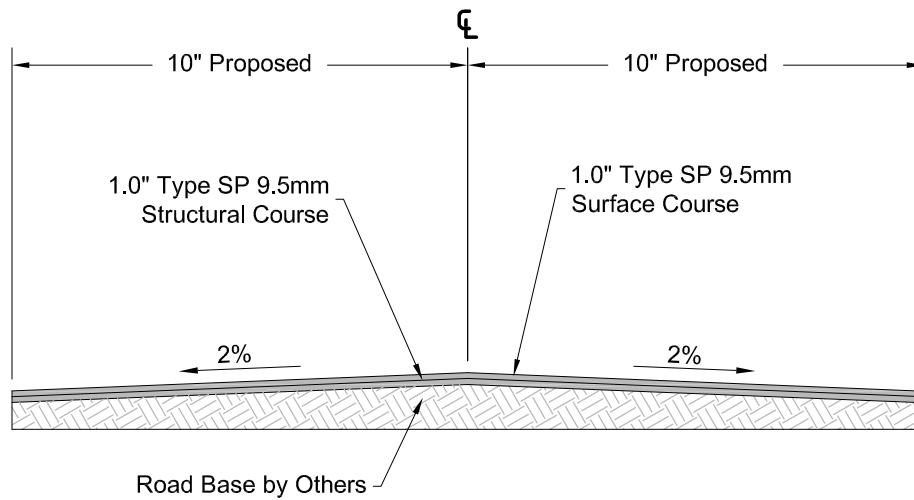

Typical Section - Floyd Gray Road

Notes:

1. County to install and rough grade base material
2. Contractor shall complete final compaction and clipping prior to paving
3. Driveways paved to ROW line
4. No drainage, striping, signage or grassing included in this bid.

Typical Section - Lawhon Mill Road/Floyd Gray Road

2023 Roadway Project
 Wakulla County B.O.C.C.
 Wakulla County, Florida