

**ITB 2023-39 Songbird Avenue Intersection Improvements and Floyd Gray Road/Lawhon  
Mill Road Paving Project  
Addendum No. 2**



**Addendum No. 2 ITB 2023-39  
SONGBIRD AVENUE INTERSECTION IMPROVEMENTS AND FLOYD GRAY  
ROAD/LAWHON MILL ROAD PAVING PROJECT**

*Issued January 25, 2024*

**SECTION 1.0 SCHEDULE OF EVENTS**

Failure to comply with this or any other paragraph of this ITB shall be sufficient reason for rejection of the Bid.



***All times listed in the Schedule of Events are Eastern Standard Time (EST).***

Event	Date/Time
Bid Advertisement Date	December 14, 2023
Release of Invitation to Bid	December 14, 2023
Mandatory Pre-Construction Conference	January 3, 2024 @ 10:00 A.M.
Questions Due from Prospective Bidder	January 10, 2024 @ 5:00 P.M.
Responses to questions due	January 17, 2024
<b>Addendum No. 2</b>	<b>January 25, 2024</b>
<b>BIDS DUE TO BOCC</b>	<b>January 30, 2024 @ 3:00 P.M.</b>
Posting of Intended Award	February 12, 2024
Board Consideration of Intended Award	February 20, 2024
Posting of Notice of Award	February 21, 2024

**This addendum is being issued to clarify the following:**

- **A 6" dry force main has been added to sheet 17 of the roundabout design for future use. Please see the revised drawing attached.**
- **Line 2.20 has been added to the Basis of Bid form to reflect this change. Please use the attached Basis of Bid.**

**\*No additional time will be provided for this change.**

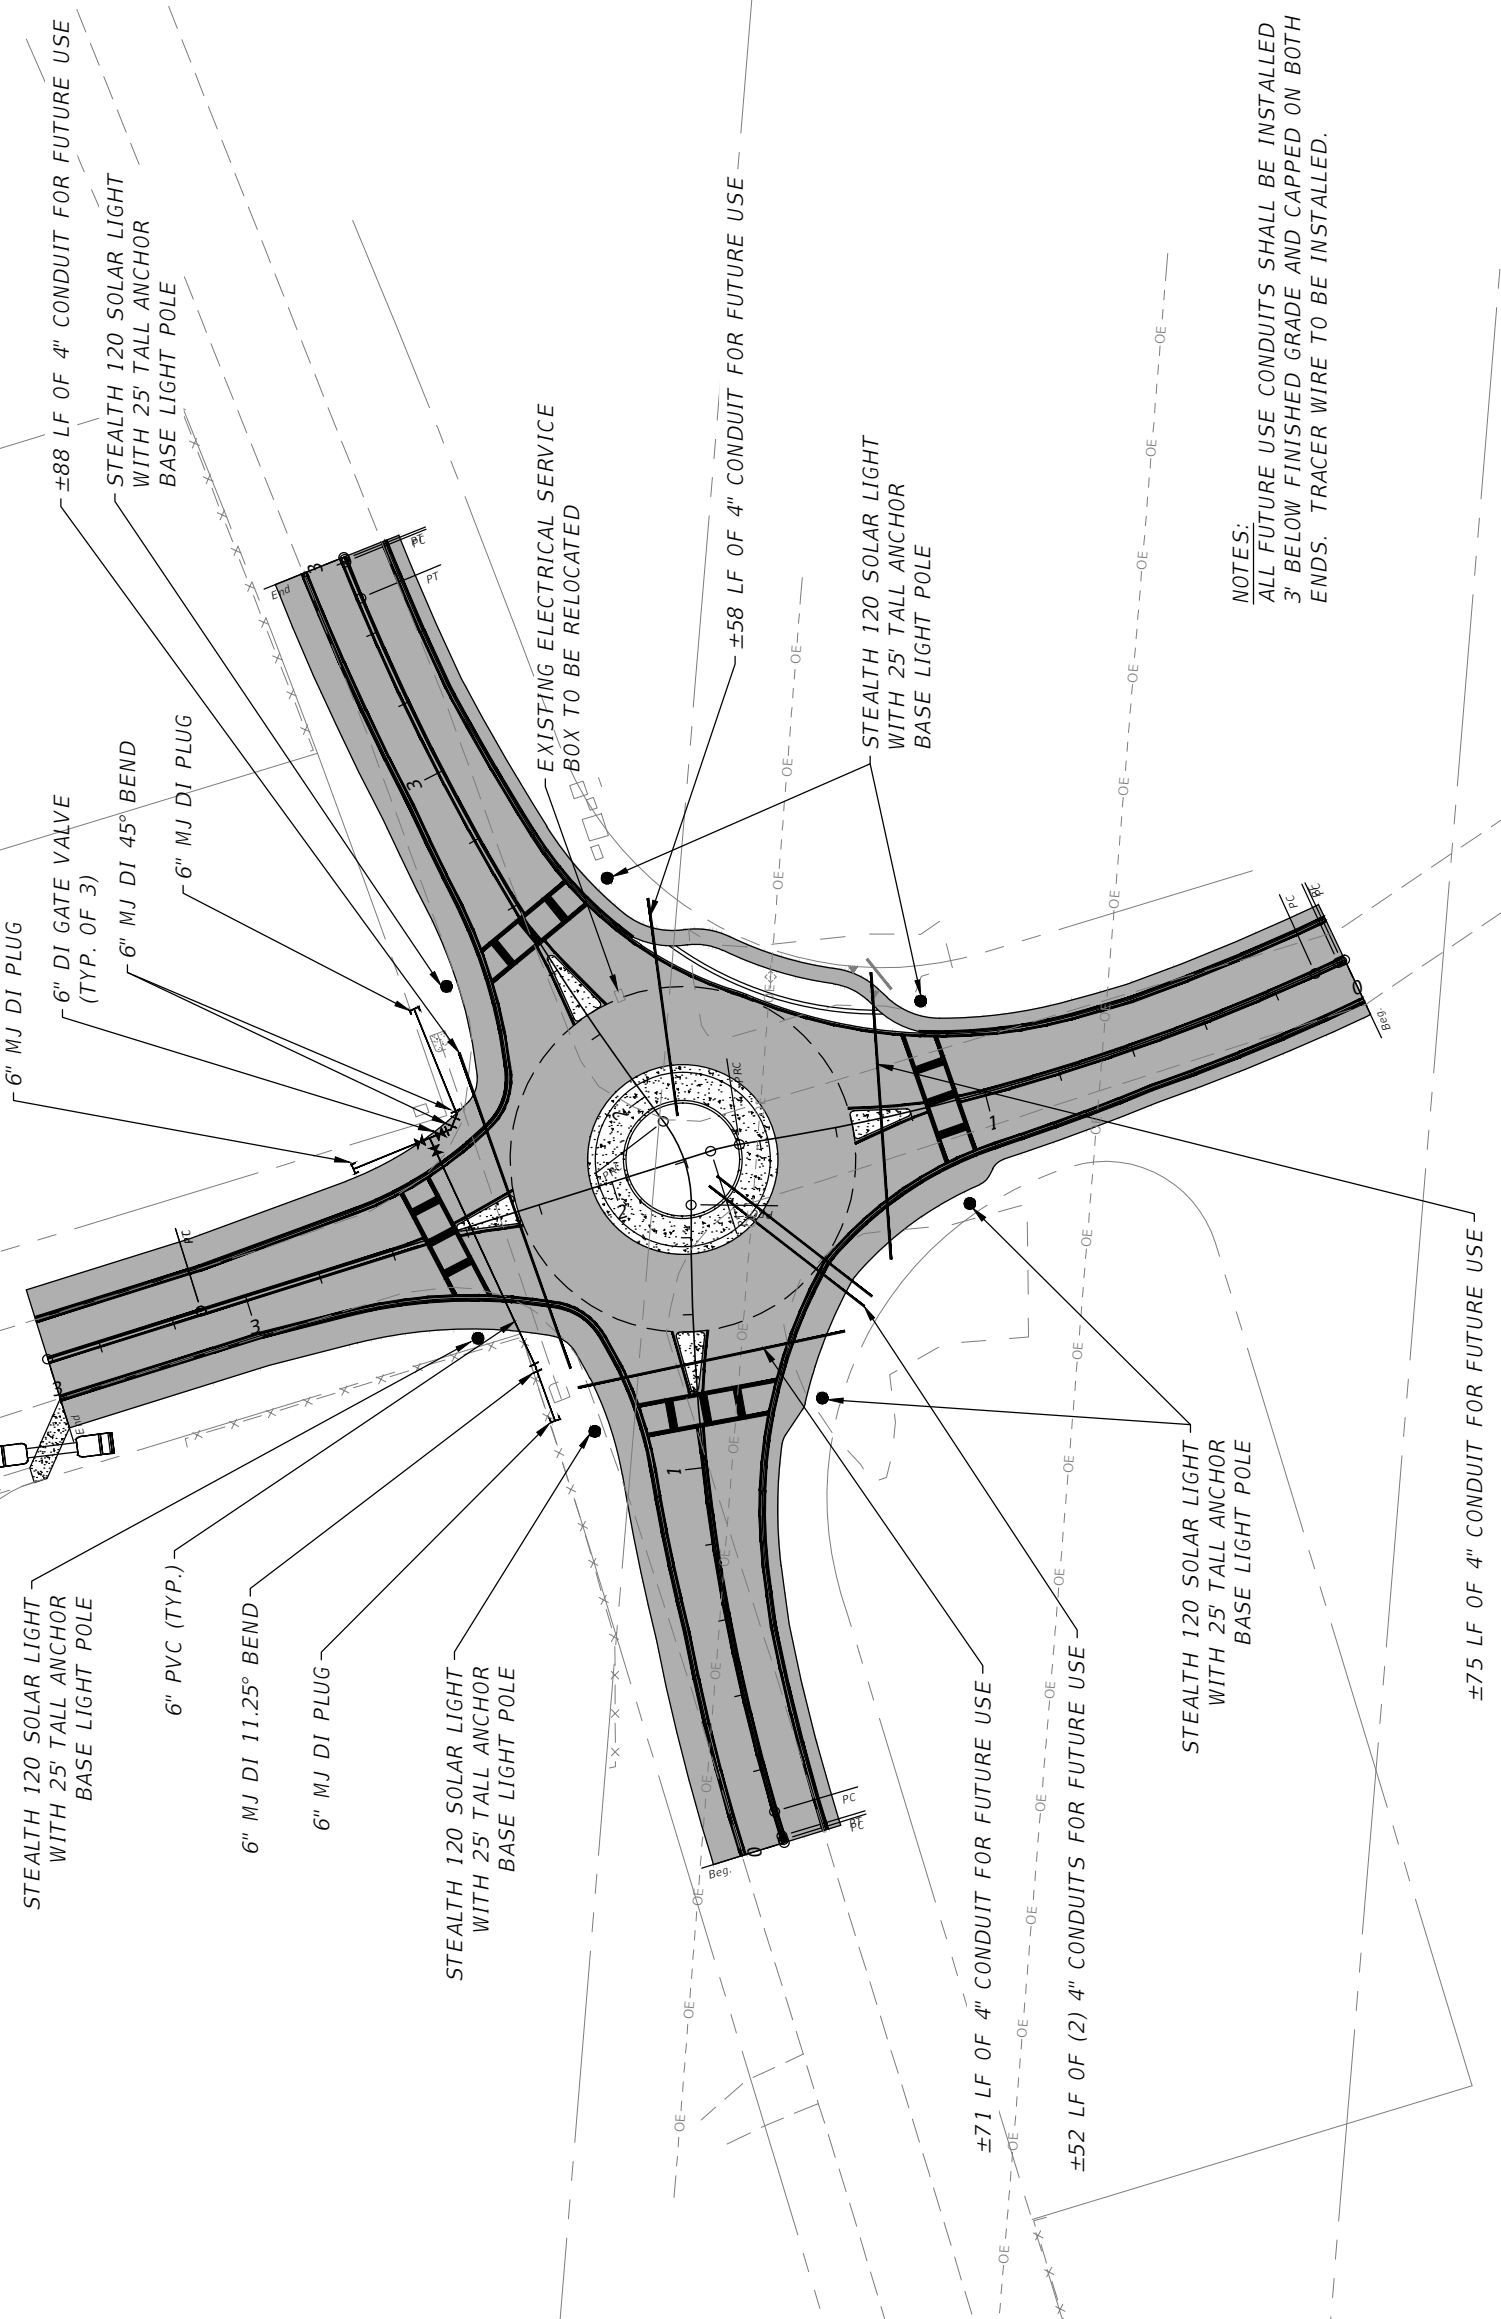

NOTES:  
 ALL FUTURE USE CONDUITS SHALL BE INSTALLED  
 3' BELOW FINISHED GRADE AND CAPPED ON BOTH  
 ENDS. TRACER WIRE TO BE INSTALLED.

REVISIONS		DESCRIPTION	
DATE	DESCRIPTION	DATE	DESCRIPTION
---	---	---	---

JUSTIN HANSEN FORD, P.E. P.E. LICENSE NUMBER 74746 DEWBERRY ENGINEERS INC. 20684 CENTRAL AVENUE EAST BLOUNTSTOWN, FL 32424		SONGBIRD AVENUE-WAKULLA ARRAN ROAD ROUNDABOUT ROADWAY PLANS	
ROAD NO. -----	COUNTY WAKULLA	FINANCIAL PROJECT ID -----	SHEET NO. 17

**UTILITY PLAN**

SONGBIRD AVENUE / US 319 TURN LANE					
ITEM NUMBER	DESCRIPTION	UNIT	QTY	UNIT PRICE	COST
<b>GENERAL COSTS</b>					
1.01	Mobilization	LS	1		
1.02	Bonds and Insurance	LS	1		
1.03	Clearing and Grubbing	LS	1		
1.04	Maintenance of Traffic	LS	1		
					<i>SUBTOTAL</i>
<b>ROADWAY</b>					
2.01	Type SP Asphalt, 9.5 mm	TN	38		
2.02	Optional Base, Base Group 10	SY	240		
2.03	12" Type B Stabilization	SY	260		
2.04	Earthwork	LS	1		
2.05	Concrete Curb, Type F	LF	132		
2.06	Pipe Culvert, Optional Material, 18"	LF	20		
2.07	Mitered End Section, 18" SD	EA	1		
2.08	Performance Turf, Sod	SY	200		
					<i>SUBTOTAL</i>
<b>SIGNAGE AND PAVEMENT MARKINGS</b>					
3.01	Painted Pavement Markings, Final Surface	LS	1		
3.02	Thermoplastic, Standard, White, Message or Symbol	EA	4		
3.03	Thermoplastic, Standard, White, Solid, 24" for Stop Line	LF	19		
3.04	Remove Sign	EA	1		
					<i>SUBTOTAL</i>
<b>TURN LANE SUBTOTAL</b>					

SONGBIRD AVENUE / WAKULLA-ARRAN ROAD ROUNDABOUT					
ITEM NUMBER	DESCRIPTION	UNIT	QTY	UNIT PRICE	COST
<b>GENERAL COSTS</b>					
1.01	Mobilization	LS	1		
1.02	Bonds and Insurance	LS	1		
1.03	Clearing and Grubbing	LS	1		
1.04	Maintenance of Traffic	LS	1		
					<i>SUBTOTAL</i>
<b>ROADWAY</b>					
2.01	Type SP Asphalt, 9.5 mm (Includes 120 tons for 4'/8' shoulders)	TN	430		
2.02	Optional Base, Base Group 6	SY	3,200		
2.03	12" Type B Stabilization	SY	3,360		
2.04	Regular Excavation	CY	1,408		
2.05	Borrow Excavation	CY	15		
2.06	Concrete Pavement for Roundabout Apron, 12" Depth	SY	140		
2.07	Concrete Traffic Separator, Special-Variable Width	SY	35		
2.08	Concrete Sidewalk, 4"	LF	20		
2.09	Concrete Curb, Type RA	LF	155		
2.10	Concrete Curb, Type D	LF	96		
2.11	Pipe Culvert, Optional Material, Other-Elliptical/Arch, 18" CD	LF	20		
2.12	Mitered End Section, Optional - Elliptical/Arch, 18" CD	EA	2		
2.13	Performance Turf	SY	1,500		
2.14	Performance Turf, Sod	SY	600		
2.15	Solar Lighting	EA	7		
2.16	Barrier Wall	LS	1		
2.17	Detour Construction (including Signage and Message Boards)	LS	1		
2.18	Subdivision Sign Relocation	LS	1		
2.19	4" Conduit	LF	396		
2.20	6" PVC Forcemain (Including valves and fittings)	LS	1		
					<i>SUBTOTAL</i>
<b>SIGNAGE AND PAVEMENT MARKINGS</b>					
3.01	Single Post Sign, F&I Ground Mount, up to 12 SF	EA	12		
3.02	Retro-Reflective/Raised Pavement Markers	EA	12		
3.03	Painted Pavement Markings, Final Surface	LS	1		
3.04	Thermoplastic, Standard, White, Message or Symbol	EA	12		
3.05	Thermoplastic, Standard-Other Surfaces, White, Solid, 6"	GM	0.47		
3.06	Thermoplastic, Standard-Other Surfaces, Yellow, Solid, 6"	GM	0.20		
3.07	Thermoplastic, Standard, White, Solid, 12" for Crosswalk and Roundabout	LF	372		
3.08	Thermoplastic, Standard, White, Skip (2' -2'), 12"	NM	0.05		
					<i>SUBTOTAL</i>
<b>ROUNDABOUT SUBTOTAL</b>					

**Lawhon Mill Rd / Floyd Gray Rd Paving**

ITEM NUMBER	DESCRIPTION	UNIT	QTY	UNIT PRICE	COST
<b>GENERAL COSTS</b>					
1.01	Mobilization	LS	1		
1.02	Bonds and Insurance	LS	1		
1.04	Maintenance of Traffic	LS	1		
					<i>SUBTOTAL</i>
<b>ROADWAY</b>					
2.01	Grading and Shaping (Lawhon Mill Rd)	LS	1		
2.02	Type SP Asphalt, 9.5 mm (Lawhon Mill Rd)	TN	1,100		
2.03	Grading and Shaping (Floyd Gray Rd)	LS	1		
2.04	Type SP Asphalt, 9.5 mm (Floyd Gray Rd)	TN	750		
					<i>SUBTOTAL</i>
					<b>PAVING SUBTOTAL</b>
					<b>PROJECT TOTAL</b>